

BioSystems

Robustness and compactibility

A25 Clinical Chemistry Analyser

Clinical analysis

human - centred biotech



A25 system:
building trust with
a durable equipment



Systemic solutions

A long history of collaboration with users to improve this analyser, together with a complete panel of clinical chemistry reagents, makes the A25 system the ideal choice for different sized laboratories. It adapts to user needs in laboratories implementing their first automated systems, as well as in addition to laboratories looking for dedicated special tests analysers or any other segment.

With more than 6000 analysers worldwide, we can offer a wide experience in Customer Support, not only responding to users requests but also developing new reagents and solutions validated under the same European brand.

Our main focus is to satisfy our users requirements and strive to exceed their technical, economical and human expectations. We are committed to providing the best possible user experience.



Scientific
& Technical
Support



Remote
Assistance



Customized
Support

Building usability



Efficiency in lab automation

The A25 was created with the aim of offering comfortable automation in its simplicity, reducing consumables and execution time of the work session.



Easy to handle and flexible system

Its low maintenance and user-friendly software make A25 a very adaptable system, contributing to solve user needs.



Reliable validated system

Dedicated and validated reagents ensure a robust and reliable analytical system.



Durability over time

System stability allows the A25 to remain an excellent work partner.


Technical Specifications

Highlights

- Optimal reagent standardization for effective use of consumables.
- Intuitive system with seamless connection to LIS.
- Open user configuration of test parameters.
- Repetition with automatic pre-dilution and post-dilution possibilities.
- Sustainable design with low water consumption.

Ordering Information

Item	Code	Quantity
A25 analyser	83101-V2	-
Concentrated system liquid	BO11524	1000 mL
Concentrated washing solution	BO13416	100 mL
Reaction rotor	AC11485	10 units
Sample wells (pediatric cups)	AC10770	1000 units
Reagent bottles 50 mL + caps	BO11493	10 units
Reagent bottles 20 mL + caps	BO11494	10 units
Amber reagent bottles 50 mL + caps	BO13442	10 units

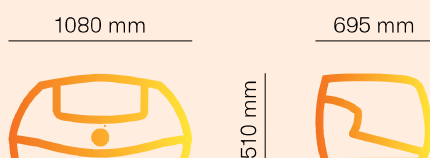

Throughputs

Throughput	240 t/h
------------	---------

Sample handling

Positions for racks (reagents or samples)	3 (reagents or samples)
Rack samples capacity	24 sample positions/rack
Maximum capacity of samples	72
Barcode reader	External (optional)
Size of primary tubes	Size of primary tubes Ø 13 mm or 15 mm (max. height 100 mm)
Sample well Diameter	13 mm
Sample types	Serum, plasma, urine, whole blood, cerebrospinal liquid, semen and biological fluids
Dispensing pump	Ceramic pump of high durability
Dispensing tip	Stainless Steel 110 mm
Level detection	Capacitive
Sample pipetting volume	From 3 µL to 40 µL
Pipetting resolution	0.1 µL
Predilution ratio	From 1:2 to 1:200
Clot detector	No
Tip wash	Inside and outside

Reagent handling

Volume of reagent bottles	20 mL, 50 mL
Positions for refrigerated reagents	30 (20 mL and 50 mL bottles)
Number of reagents per reagent rack	10 bottles of 20 or 50 mL
Cooled reagent	Yes
Temperature range of refrigerator	10°C below room temperature (at 25°C)
R1 volume	10 µL to 440 µL
R2 volume	10 µL to 200 µL
Dispensing mode	Ceramic pump without maintenance
Pipetting resolution	1 µL
Tip wash	Inside and outside

Reactions rotor

Reaction volume range	From 180 µL to 800 µL
Number of wells	120
Well material	UV methacrylate
Type of incubation	Dry without maintenance
Temperature	37.0 °C
Temperature accuracy	±0.2 °C

Optical System

Light Source	Halogen lamp (12V, 20W)
Lightpath	6 mm
Wavelengths	340 - 405 - 505 - 535 - 560 - 600 - 635 - 670 nm (+1 additional filter can be added by user)
Wavelength accuracy	±2 nm
Spectral range	340 - 900 nm
Photometric range	-0.05 to 3.0 A
Photometric detection system	Silicon photodiode
Internal resolution	<0.0001 A
Baseline stability	Max. 0.004 A, 30 minutes at 505 nm

Size and weight

Size (w., d., h.)	1080 x 695 x 510 mm
Weight	70 kg

Electrical and Environmental Requirements

Mains voltage	115 to 230 V
Mains frequency	50 or 60 Hz
Electric power	300 VA
Ambient temperature	From 10 to 35°C
Relative humidity	<75%
Altitude	<2500 m

Fluidic Requirements

System liquid solution bottle volume	2.7 L
Washing solution bottle volume	2.7 L
Waste solution bottle volume	2.7 L

Minimum Computer Requirements



Operating system	Windows® 10 64 bit (x64)
CPU	Equivalent to Intel Core i3 @3.10 GHz or higher
RAM	512 MB
Hard Disk	20 GB or higher
Monitor minimum resolution	800x600
Connector of serial channel	USB

Laboratory Information Systems (LIS)

Connectivity to LIS	Yes
---------------------	-----

Regulatory Compliance

IVD - CE	Regulation (EU) 2017/746
----------	--------------------------

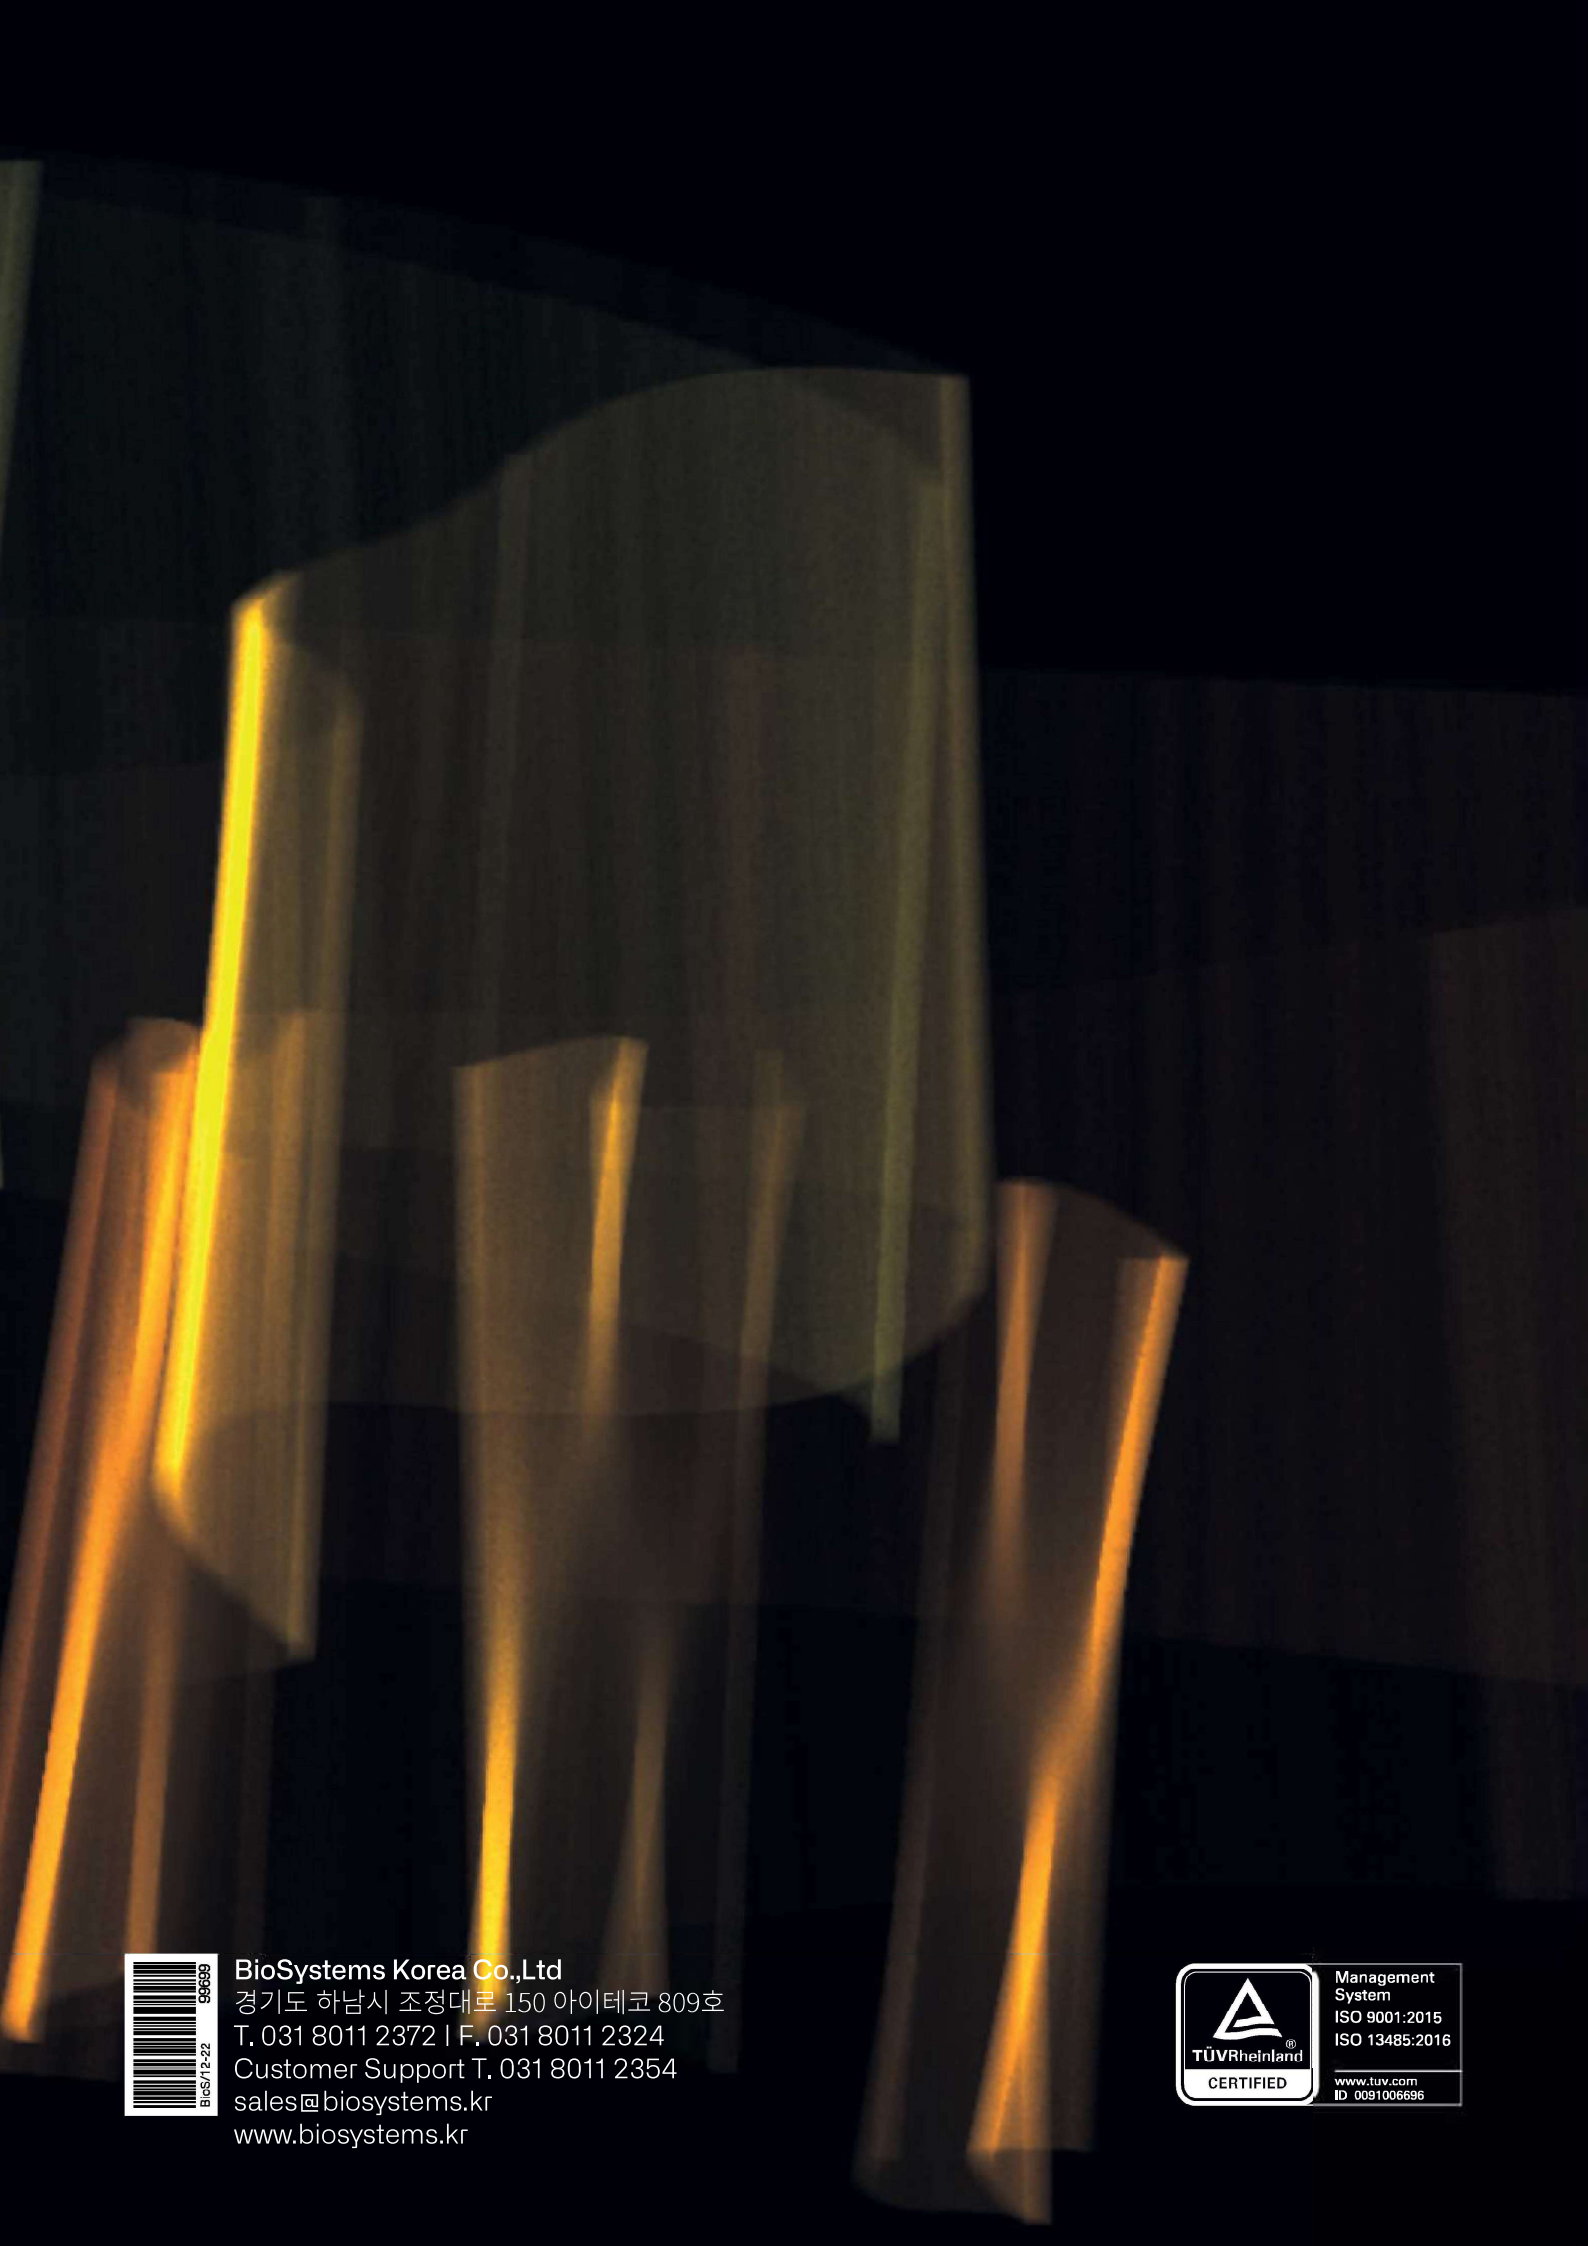

BioSystems Korea Co.,Ltd
경기도 하남시 조정대로 150 아이테크 809호
T. 031 8011 2372 | F. 031 8011 2324
Customer Support T. 031 8011 2354
sales@biosystems.kr
www.biosystems.kr



Management
System
ISO 9001:2015
ISO 13485:2016
www.tuv.com
ID 0091006696